

PSE151DG

48V to 24V PoE Injector, Gigabit


FEATURES

- +/- 48V DC input; 24V Passive PoE output
- Provide power and access to device at the same time
- Power-in/Power-out LED display
- Easy-Positioning design, simple installation for vertical or horizontal direction
- Dual (DC-in/battery) input power redundancy



OVERVIEW

PSE151DG is a 48V to 24V Gigabit PoE injector that it is flexible and convenient to be powered by a DC connector and Terminal block as redundant dual-Input design.

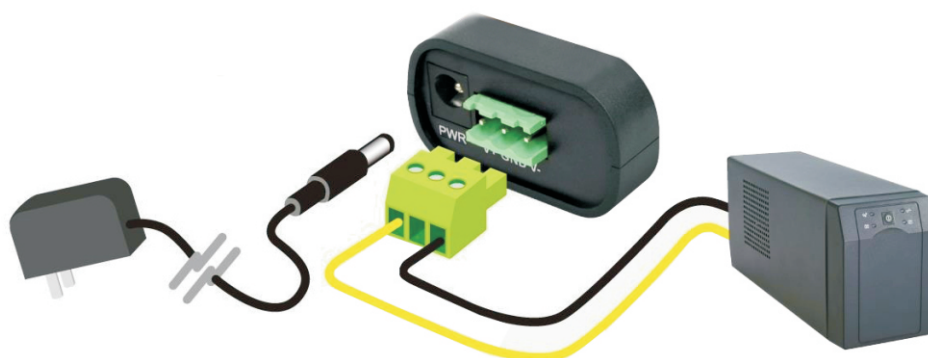

PSE151DG

SPECIFICATIONS

Input	48VDC (+/- 36VDC ~ +/- 58VDC)
Output	24VDC +/-10% 0.7A (max.)
Power + Data Out	4/5 Pin (+) & 7/8 Pin (-) for Power
Dimensions	102.5 (L) x 47.5 (W) x 27 (H) mm 4.03 (L) x 1.87 (W) x 1.06 (H) inch
Data rate	10/100/1000Mbps (Gigabit)
Connector	1x Data Input RJ45 1x Data+Power Output RJ45 1x Power Input: DC Jack (2.1/5.5) 1x Power Input: Terminal Block Connector
Operation Temperature	-25 ~ 75°C (-13 ~ 167°F)
Storage Temperature	-35 ~ 85°C (-31 ~ 185°F)
LED	Input LED Output LED

